

COB 2 Eye Led blinder lights User's manual



Features:

Voltage: AC100V-240V 50/60HZ

Total Power: 200W

LED Light Source: Each Power 100W

Quantity: 2pcs

Lifespan: 50000 hours

Color: Warm White

Color Temperature: Linear color temperature correction
3200K/5600K

Beam Angle: 60°

Strobe: Strobe 1-25Hz


Control Mode: DMX512

Channel: 2/4/6CH

IP Rate: IP20

Ambient Temperature: -20°C~40°C

1.Graphic part:

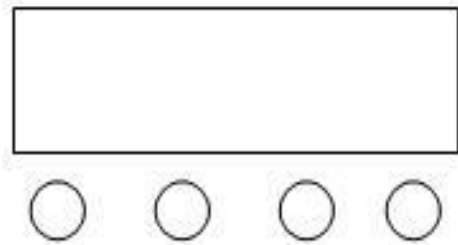

- A. Menu
- B. Up
- C. Done
- D. Enter
- E. LED Display

A B C D

Press the function key A will cycle out of nine different function effects, The two numbers before the digital tube represent the current function (see the menu). The last two numbers represent the function which is the address code or speed parameters. Press B or C, you could modify the parameter. Press D is confirm.

2.Led Display Chart (All functions selected by pressing the D key to confirm)

NO	Display	function
1	A001	channels address, (001—512) B, C plus or minus key address code value
2	2CH-4CH-6CH	<u>Multiple channel mode selection</u>
3	CC99	Running pattern, (01-99) B, C key to modify the running pattern
4	CP99	Running speed, (01-99) B, C keys to change the transition speed
5	DE99	Gradient, (01-99) B, C key to modify the pulse change, gradual speed
6	BEBE	Voice change
7	Y255	Y color selection, (000-255) B, C key to modify the color selection
8	W255	White color selection, (000-255) B, C key to modify the color selection
9	-ON-/ -OFF	Display screen on / off

3.DMX512 CHANNEL TABLE(A6ch)

NO	function	Description
Channel 1	Dimmer	Dimmer linear dimming from dark to bright
Channel 2	Strobe	Strobe , Slow -- Fast
Channel 3	Function select	0—50: DMX Channel mode; 51—100: Running pattern,; 101—150: Running speed; 151—200: Gradien; 201—255: Voice change
Channel 4	Speed	Speed slow-fast
Channel 5	Y Dimmer	Y Dimmer, linear dimming from dark to bright
Channel 6	W Dimmer	W Dimmer, linear dimming from dark to bright

4.DMX512 Channel Description(b6ch)

NO	function	Description
Channel 1	Dimmer	Dimmer linear dimming from dark to bright
Channel 2	Y Dimmer	Y Dimmer, linear dimming from dark to bright
Channel 3	W Dimmer	W Dimmer, linear dimming from dark to bright
Channel 4	Strobe	Strobe , Slow -- Fast
Channel 5	Function select	0—50: DMX Channel mode; 51—100: Running pattern,; 101—150: Running speed; 151—200: Gradien; 201—255: Voice change
Channel 6	Speed	Speed Slow - Fast

5.DMX512 Channel Description(A4ch)

NO	Function	Description
Channel 1	Dimmer	Dimmer,linear dimming from dark to bright
Channel 2	Y Dimmer	Y Dimmer,linear dimming from dark to bright
Channel 3	W Dimmer	W Dimmer,linear dimming from dark to bright
Channel 4	Strobe	Strobe,Slow -- Fast

6.DMX512 Channel Description(b4ch)

NO	Function	Description
Channel 1	Dimmer	Dimmer,linear dimming from dark to bright
Channel 2	Strobe	Strobe , Slow -- Fast
Channel 3	Function select	0—50: DMX Channel mode; 51 — 100: Running pattern,; 101—150: Running speed; 151—200: Gradien; 201—255: Voice change
Channel 4	Speed	Speed,Slow - Fast

7. DMX512 Channel Description(A2ch)

NO	Function	Description
Channel 1	Dimmer	Dimmer linear dimming from dark to bright
Channel 2	Strobe	Strobe , Slow -- Fast

8. DMX512 Channel Description(b2ch)

NO	Function	Description
Channel 1	Y Dimmer	Y Dimmer , linear dimming from dark to bright
Channel 2	W Dimmer	W Dimmer , linear dimming from dark to bright

9. Features:

Operation is very simple, user-friendly design, flicker-free dimming, jitter and so on. Can be adapted to film, photograph, television and other demanding occasion for lighting.